




# Platinum 2.1MP Network Motorized Lens Bullet Camera CMIP9223W-SZ



## Key Features:

- 2.1MP High Definition
- True WDR 120dB
- 3D DNR, Smart heater, Intelligent H.264 Zip+
- Audio I/O, Alarm I/O
- 4.7-94mm VF Motorized Lens
- IP67
- DC 12V/PoE

## Dimensions:

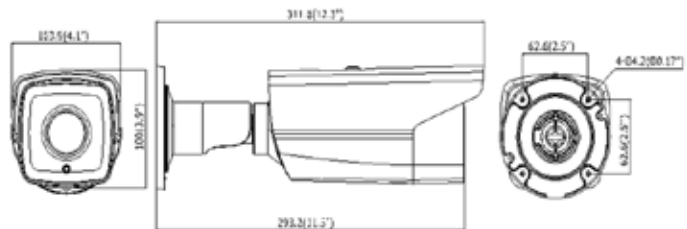

**TRUE  
WDR**  
120dB

# Platinum 2.1MP Network Motorized Lens Bullet Camera CMIP9223W-SZ

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	0.005 Lux @ (F1.2, AGC ON), 0 lux with IR; 0.007 Lux @ (F1.4, AGC ON), 0 lux with IR
Shutter Speed	1/3 s to 1/100,000 s
Slow Shutter	Support
Lens	4.7-94mm @ F1.4 angle of view:53.8° ~3.1°
Lens Mount	AF automatic focusing and motorized zoom lens
Auto-iris	DC drive
Day & Night	IR cut filter with auto switch
DNR	3D DNR
Wide Dynamic Range	120dB
Compression Standard	
Video Compression	H.264 Zip+/H.264/MJPEG/MPEG4
H.264 Type	Baseline Profile / Main Profile / High Profile
Video Bit Rate	32 Kbps – 16 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2
Audio Bit rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	1920 × 1080
Max. Frame Rate	60Hz: 60fps (1920 × 1080)/(1280 × 960)/(1280 × 720) 50Hz: 50fps (1920 × 1080)/(1280 × 960)/(1280 × 720)
Third Stream	Independent with Main Stream and Sub Stream, up to 50Hz: 1fps(1920 × 1080); 60Hz: 1fps (1920 × 1080)
Image Enhancement	EIS/BLC/HLC/3D DNR/ROI/Defog
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Distortion Correction	Support
Regional Cropping	Support
Day/Night Switch	Auto/Schedule/Triggered by Alarm In
Picture Overlay	LOGO picture can be overlaid on video with 128x128 24bit bmp format
Network	
Network Storage	NAS (Support NFS,SMB/CIFS), ANR
Alarm Trigger	Motion Detection, Tampering Alarm, Intrusion Detection, Line Crossing Detection, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	User Authentication, Watermark, IP address filtering, Anonymous access
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI

# Platinum 2.1MP Network Motorized Lens Bullet Camera CMIP9223W-SZ

Interface	
Audio	1-ch 3.5 mm audio in (Mic in/Line in)/out interface
Communication Interface	1 RJ45 10M/100M/1000M Ethernet port, 1 RS-485 interface
Alarm	1 input, 1 output (up to DC24V 1A or AC110V 500mA)
Video Output	1Vp-p composite output (75 Ω/BNC)
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Reset	Yes
Audio	
Environment Noise Filtering	Support
Audio I/O	Support dual audio track, stereo
Audio Sampling Rate	16kHz / 32kHz / 44.1kHz / 48kHz
General	
Working Temperature /Humidity	-40 °F ~ 140 °F (-40 °C ~ 60 °C)
	Humidity 95% or less (non-condensing)
Power Supply	DC12V ±10%, PoE (802.3af)
Power Consumption	Max. 13W (Max. 18 W with Heat on)
IR Range	Approx. 394ft(120 meters)
Weather Proof Ratings	IP67
Dimensions	3.9" × 4.1" × 12.3" (100×103.9×311.8mm)
Weight	4.4lbs (2000 g)